


FLEXPRO

PROFILE-CUT VENTING MATERIAL

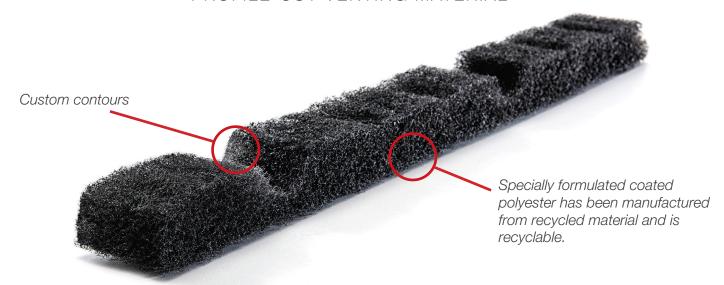

Save on energy costs while protecting your building from moisture, pests and dust with FlexPro,[™] exclusively from

Marco. Part of the Marco
Weather-Tite™ System and the newest
addition to our line of ventilation
solutions, FlexPro offers a balanced
combination of outstanding features
from our superior LP2™ and
economical Flex-O-Vent™ products.
Made with Marco's unique polyester
fiber, FlexPro delivers durable,
long-lasting performance.

FlexPro's polyester nonwoven material outlasts and outperforms competitors' polyurethane products. Unlike polyurethanes that absorb moisture, can freeze and block ventilation, FlexPro is made to perform in all seasons and is backed by Marco's 40-year limited product warranty.

- Effective rib-cut profile fits most metal roofs
- High density ensures quick, full material recovery after installation
- Easy, one-person installation

- Eliminates condensation and prevents moisture, pest and dust from entering the structure
- Reduces utility bills through added attic ventilation
- Low profile design offers nonobtrusive appearance
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Available in box or roll quantities



FLEX-O-VENT

A

Our original, most economical polyester-based ventilation product.

FLEXPRO

BETTER

New! A profile-cut strip or roll designed to fit most roof panels.

LP2 RIDGE VENT

BESI

Premier custom-cut vent strip includes Python™ polyester vent material inserts for optimum fit and ventilation.



The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

i iasi iii ig

Sealants
Underlayment

Accessories

Value drives everything we do. That's why we developed the Marco Weather-Tite System— a comprehensive line of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties. Get more quality, more performance and more value ... from Marco.



Specs

Net Free Area: For 3/4" rib, 28 sq. in. NFA per lineal foot of ridge*

1-3/8" x 2" x 20' Roll: Rib heights up to 3/4" 1-3/8" x 2" x 3' Strip: Rib heights up to 3/4"

Roof Slope: Fits 2:12 and up

Air Permeability: >800 cubic feet per minute

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175% **Compressive Strength:** 1.8 psi at 75%

ASTM Testing: D1929, D737 *Effective Net-Free Area determined by profile.







You May Also Need

■ Roof Boots[™] / Weather-Tite Metal Roof Sealant

Easy Install

See our installation instructions online at MarcoIndustries.com. To install FlexPro, simply peel and stick the product to the metal roof, careful to match the custom-cut contours to roof ridges. Next put the ridge cap in place and fasten down-slope from the FlexPro product (shown below):



Step 1:

FlexPro comes in various panel configurations, roll and stick package options. Apply the FlexPro Ridge Vent to metal roof by removing the backing paper.



Step 2:

Align the FlexPro Ridge Vent 1/2"-1" up-slope from the edge of the ridge cap. Place onto metal roof with adhesive side down. Note that the adhesive is strong and once put in place it will be hard to move. Be sure the FlexPro Ridge Vent is in place the first time.



Step 3:

When attaching consecutive FlexPro Vents, butt fit the pieces together. Marco Weather-Tite Metal Roof Sealant can be used to seal the butt joint. Place ridge cap over FlexPro. Secure in place with Marco QuickGrip/QuickDrill fasteners; fasten through the metal roof ridge locations, avoiding penetrating the FlexPro material, using a min. 3300 rpm screw qun.



800.800.8590 / MarcoIndustries.com

