




- 40 Yr. Paint Warranty
- 29 Gauge Galvalume Substrate AZ50
- 16 Popular Colors
- Mfg. to Length
- 36" Wide Panels
- Akzo Nobel (Ceram-A-Star 1050)



Hi-Lo screws are some of the best in the industry. They are sharper, drill better, and the cut point is true. The paint stays on when installing and builder's prefer Levi's "true" sizing and Hi-Lo threading

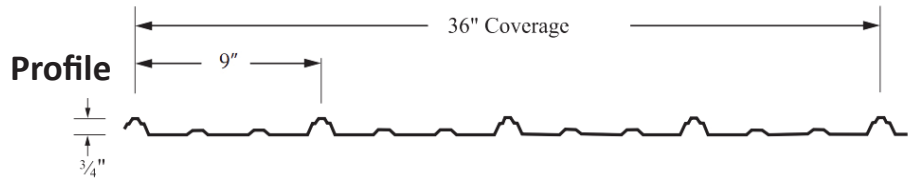

- #10 Hi-Lo Screw, Type 17 Point
- Mechanical Galvanized
- Hi-Lo threads
- Galvanized EPDM washer 1/2" OD
- Fastens metal to wood

**Snow Guards—Matching Colors** Snow

16 Gauge Type 304 Stainless



Defender 4500 w/ EPDM Rubber Sealer is designed for use with exposed fastener panels on 2x4 purlins in the flat position.

Use our #14 replacement screw, sold separately.

**Ridge Vent** - 1 3/4" wide x 3' long with/ permanent glue strips, Fastvent Plus™ provides ventilation and uniform air flow for the proper maintenance of metal roofs. Engineered breathable closure strips eliminate any leak path into the ridge area by



completely sealing against the panel profile. This form-fit reduces wind-driven rain problems to a minimum. Closed cell polyethylene completely surrounds the open-cell venting foam. Zero snow infiltration.

**Roof Panel Closure Strips—1"x36"**



- Glue already applied
- Easy Installation
- Two Profiles (inside filler or outside filler)

**SUNSKY®** Roof Lights, and Sidelights. High performance glazing that stands up to



punishing exterior applications, SunSky Corrugated Polycarbonate Panels offer multiple advantages over traditional fiberglass corrugated panels: up to 20 times greater impact resistance, the highest light transmission rates, with the lowest yellowing index.

36"x12' clear or white Opal

**Pipe Boot -EPDM**

SKU	Pipe Size
RB3	1/4"-5"
RB5	4.25"-7.75"
RB8	7"-13"



**Butyl Tape** — 1/2"x3/32x50' Protect and seal cracks, seams and vents on metal roofs for a reliable and superior seal. Butyl tape adheres easily to metal roofing and is recommended for roof slope less than 3/12" pitch.



**Emseal®**, 1/4"x1"x19' 3/4" expanding to 1" is a self-adhering, flexible foam sealant which expands to fill contours and gaps. Use Emseal® to seal out dust, air, wind-driven snow and moisture through joint details in metal building and roofs. The sealant has a self-adhesive on one side. After